


3636CBS

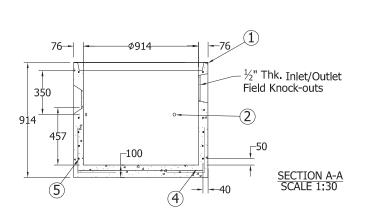


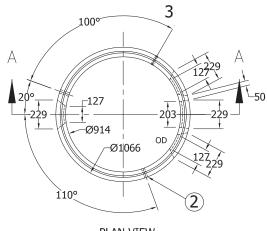


PLAN VIEW SCALE 1:30



BASE REINFORCING SCALE 1:30

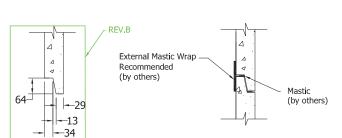

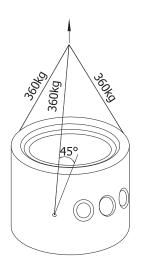

3D VIEW

Drawn '

TONGUE & GROOVE DETAIL REV.B SCALE 1:15

SUGGESTED JOINT DETAIL SCALE 1: 15

Specification and General Notes:

-32 -13

64-

-31

- Specification and General Notes:

 1. Manhole design/manufacture to ASTM C478M Specification.

 2. Concrete testing to current version of ASTM C497(SA 23.182.

 3. Min. concrete compressive strength 30 MPa with Max. W/C ratio of 0.5

 4. Gasket to ASTM C-443 specification (by others).

 5. Concrete cover to be Min.25mm.

 6. All dimensions to be millimeter.

 7. Welded wire mesh overlap to be 300mm.

 8. Manhole design and construction to MMCD manhole specification section 02725.

 9. Manufacturing tolerance to be +/- 5mm.

 10. Concrete Exposesure Class to be A-3

 11. Min. Stripping Strength to be 15MPa

 12. All Form Firish to be Standard Grade

 13. All Unformed Finish to be Steel Trowelled Finish or Wood Float Finish

 14. Lifting cable and accessaries to meet the strength requirement in lifting detail

 15. Hoisting and Rigging system to meet WORK SAFE BC OHS Regulation Guideline Part 14/15

DΙ	MOND
	PRECAST CONCRETE

	Description:	Diawii .	Date.	Catalog No.	ı
	914ID x 914H Sump/Catch Basin GT	D.L	15/09/2016	3636CBS	
	51410 x 51411 Sump/ Catch basin G1	Aproved:	Load Rating:	3030003	
36"ID x 36"H Manhole Base 1600 #		V.W.	N/A	Dwg, No.	
		Rev. No.	Scale :	36-04	ı
	Project:	В	As Shown	30 OT	ı
c	. V5A 2H7 Phone: 604-415-5181 Fax: 604-415-5185	This drawing is t Diamond Precast Co	he property of the	Sheet No.	
_	warm diamondarecast com	contained herein is	confidential and may	1 OF 1	ı

7520 Conrad Street


Burnaby, B.C.


www.diamondprecast.com


contained herein is confidential and may not be used In whole or In part without written permission from the owner


Date :


Catalog No.

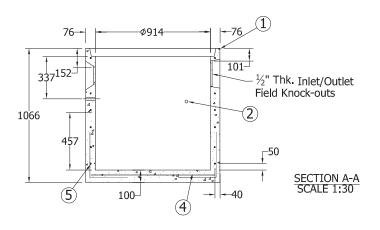

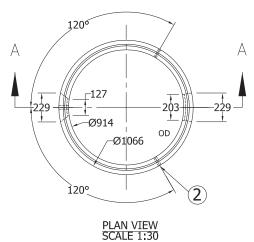

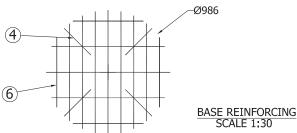

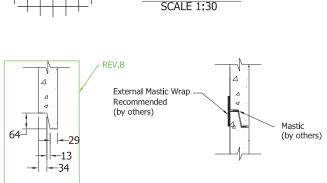

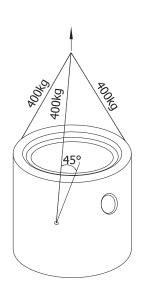

3D VIEW

TONGUE & GROOVE DETAIL REV.B SCALE 1:15

SUGGESTED JOINT DETAIL SCALE 1: 15

Specification and General Notes:

-32 -13

64-

-31

- Specification and General Notes:

 1. Manhole design/manufacture to ASTM C478M Specification.

 2. Concrete testing to current version of ASTM C497/CSA 23.182.

 3. Min. concrete compressive strength 30 MPa with Max. W/C ratio of 0.5

 4. Gasket to ASTM C-443 specification (by others).

 5. Concrete cover to be Min.25mm.

 6. All dimensions to be millimeter.

 7. Welded wire mesh overlap to be 300mm.

 8. Manhole design and construction to MMCD manhole specification section 02725.

 9. Manufacturing tolerance to be +/- 5mm.

 10. Concrete Exposesure Class to be A-3

 11. Min. Stripping Strength to be 15MPa

 12. All Form Finish to be Standard Grade

 13. All Unformed Finish to be Steel Trowelled Finish or Wood Float Finish

 14. Lifting cable and accessaries to meet the strength requirement in lifting detail

- 14. Lifting cable and accessaries to meet the strength requirement in lifting detail
 15. Hoisting and Rigging system to meet WORK SAFE BC OHS Regulation Guideline Part 14/15



	Description			9	
	914ID x 1067H CB OIL INTERCEPTOR	D.L	15/09/2016	3642CB01	
	9141D X 100711 CD OIL INTERCEPTOR	Aproved:	Load Rating:	3042CBO1	
≣	36"ID x 42"H OIL INTERCEPTOR 1810 #	V.W.	N/A	Dwg. No.	
	Project:	Rev. No. B	Scale : As Shown	36-06	
.C	V5A 2H7 Phone: 604-415-5181 Fax: 604-415-5185	Diamond Precast Co	he property of the acrete. All information confidential and may	Sheet No.	

7520 Conrad Street

Burnaby, B.C

www.diamondprecast.com


not be used in whole or in part without written permission from the owner


Date:

Drawn:


1 OF 1

Catalog No.

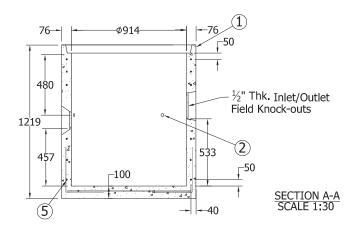


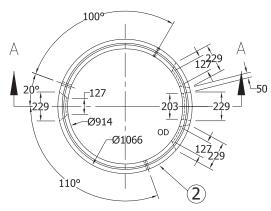


PLAN VIEW SCALE 1:30



BASE REINFORCING SCALE 1:30

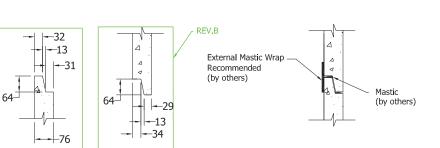

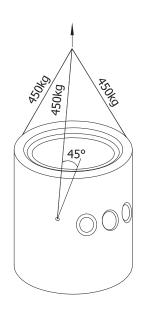

3D VIEW

TONGUE & GROOVE DETAIL REV.B SCALE 1:15

SUGGESTED JOINT DETAIL SCALE 1: 15

Specification and General Notes:

- Specification and General Notes:

 1. Manhole design/manufacture to ASTM C478M Specification.

 2. Concrete testing to current version of ASTM C497(SSA 23.182.

 3. Min. concrete compressive strength 30 MPa with Max. W/C ratio of 0.5

 4. Gasket to ASTM C-443 specification (by others).

 5. Concrete cover to be Min.25mm.

 6. All dimensions to be millimeter.

 7. Welded wire mesh overlap to be 300mm.

 8. Manhole design and construction to MMCD manhole specification section 02725.

 9, Manufacturing tolerance to be +/- 5mm.

 10. Concrete Exposesure Class to be A-3

 11. Min. Stripping Strength to be 15MPa

 12. All Form Finish to be Standard Grade

 13. All Unformed Finish to be Steel Trowelled Finish or Wood Float Finish

 14. Lifting cable and accessaries to meet the strength requirement in lifting detail

 15. Hoisting and Rigging system to meet WORK SAFE BC OHS Regulation Guideline Part 14/15

DI	MOND PRECAST CONCRETE
	PRECAST CONCRETE

	Description:	Diawii .	Date .	Catalog No.
	914ID x 1219H CB	D.L	15/09/2016	3648CBS
	71 113 X 1113 II 35	Aproved:	Load Rating:	3046CB3
Έ	36"ID X 48"H CB 1978#		N/A	
_			'','	Dwg. No.
		Rev. No.	Scale :	36-08
	Project:	В	As Shown	30-00
B.C	.C. V5A 2H7 Phone: 604-415-5181 Fax: 604-415-5185 This drawing is the property of the Diamond Precast Concrete. All information			

7520 Conrad Street

Burnaby, B www.diamondprecast.com

contained herein is confidential and may not be used In whole or In part without written permission from the owner

Date :

Drawn '

Catalog No.

1 OF 1