



1824ST

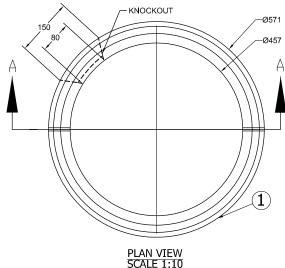


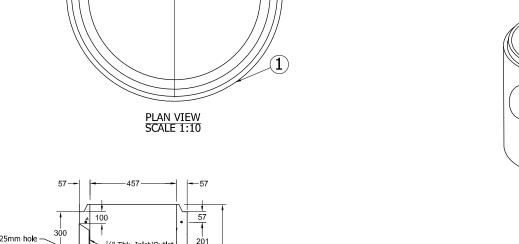

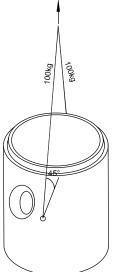


3D VIEW









Specification and General Notes:

- Specification and General Notes:

 1. Manhole design/manufacture to ASTM C478M & CSA A257.3 Specification.
 2. Concrete testing to ASTM C497/CSA 23.1 & 2-09.
 3. Min. concrete compressive strength 30 MPa with Max. W/C ratio of 0.5
 4. Gasket to ASTM C-443 specification (by others).
 5. Concrete cover to be Min.25mm.
 6. All dimensions to be millimeter.
 7. Welded wire mesh overlap to be 300mm.
 8. Manhole design and construction to MMCD manhole specification section 02725.
 9. Manufacturing tolerance to be +/- 5mm.
 10. Concrete Exposesure Class to be A-3
 11. Min. Stripping Strength to be 15MPa
 12. All Form Finish to be Standard Grade
 13. All Unformed Finish to be Steel Trowelled Finish or Wood Float Finish
 14. Lifting cable and accessaries to meet the strength requirement in lifting detail

- 14. Lifting cable and accessaries to meet the strength requirement in lifting detail

DΙ	MOND
	PRECAST CONCRETE

Description:	Drawn :	Date :	Catalog No.
457 ID x 610 H Sump/Catch Basin TT	A.M	25/10/2014	1824ST
437 10 X 010 II Sump/ Catch basin 11	Aproved :	Load Rating:	102431
18"ID x 24"H Sump/Catch Basin #355		N/A	Dwg. No.
Project:	Rev. No.	Scale : As Shown	18-05
	This drawing is the property of the		Sheet No.

7520 Conrad Street

Burnaby, B.C. V5A 2H7


Phone: 604-415-5181

Fax: 604-415-5185


Diamond Precast Concrete. All Information contained herein is confidential and may not be used in whole or in part without written permission from the owner


1 OF 1

1824S

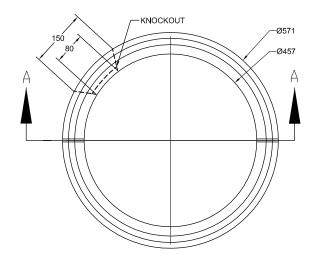


PLAN VIEW SCALE 1:10









Specification and General Notes:

- Specification and General Notes:

 1. Manhole design/manufacture to ASTM C478M & CSA A257.3 Specification.
 2. Concrete testing to ASTM C497/CSA 23.1 & 2-09.
 3. Min. concrete compressive strength 30 MPa with Max. W/C ratio of 0.5
 4. Gasket to ASTM C-443 specification (by others).
 5. Concrete cover to be Min.25mm.
 6. All dimensions to be millimeter.
 7. Welded wire mesh overlap to be 300mm.
 8. Manhole design and construction to MMCD manhole specification section 02725.
 9. Manufacturing tolerance to be +/- 5mm.
 10. Concrete Exposesure Class to be A-3
 11. Min. Stripping Strength to be 15MPa
 12. All Form Finish to be Standard Grade
 13. All Unformed Finish to be Steel Trowelled Finish or Wood Float Finish
 14. Lifting cable and accessaries to meet the strength requirement in lifting detail 14. Lifting cable and accessaries to meet the strength requirement in lifting detail

^	Description:
DI MOND	457
PRECAST CONCRETE	

	457 ID x 610 H Sump/Catch Basin GT	A.M	25/10/2014	1824S
		Aproved :	Load Rating:	10243
_	18"ID x 24"H Catch Basin #355		N/A	Dwg. No.
	Project:	Rev. No.	Scale : As Shown	18-04
		This drawing is the	nroperty of the	Sheet No.

7520 Conrad Street

Burnaby, B.C. V5A 2H7

Phone: 604-415-5181

Fax: 604-415-5185

This drawing is the property of the Diamond Precast Concrete. All information contained hereln is confidential and may not be used in whole or in part without written permission from the owner

Drawn:

Date:

1 OF 1

Catalog No.

100kg	
	<i>)</i>)
45°	4

3D VIEW