DIAMOND
PRECAST CONCRETE & MUNICIPAL CASTINGS

CSA® A23-4 - 16 ASTM C478

SUPPORTING MEMBER MMCD PLATINUM 2009 EDITION

WEEKLY PROJECT PROFILE

NOV 16, 2017

LARGE DIAMETER PREBENCHED STORM MANHOLE BASES

1500mm and 1800mm storm manholes featuring Predl FRP A-Lok bells for ADS SaniTite HP pipes

Project: Detention Pond @ 80 Ave. & 206 St. [Township of Langley, BC] **Precaster:** Diamond Precast [Burnaby, BC]
Engineer: McElhanney Consulting Services Ltd. [Surrey, BC] **Contractor:** Gemco Construction Ltd [Langley, BC]

FINISHING OF THE PREDL FRP A-LOK BELL

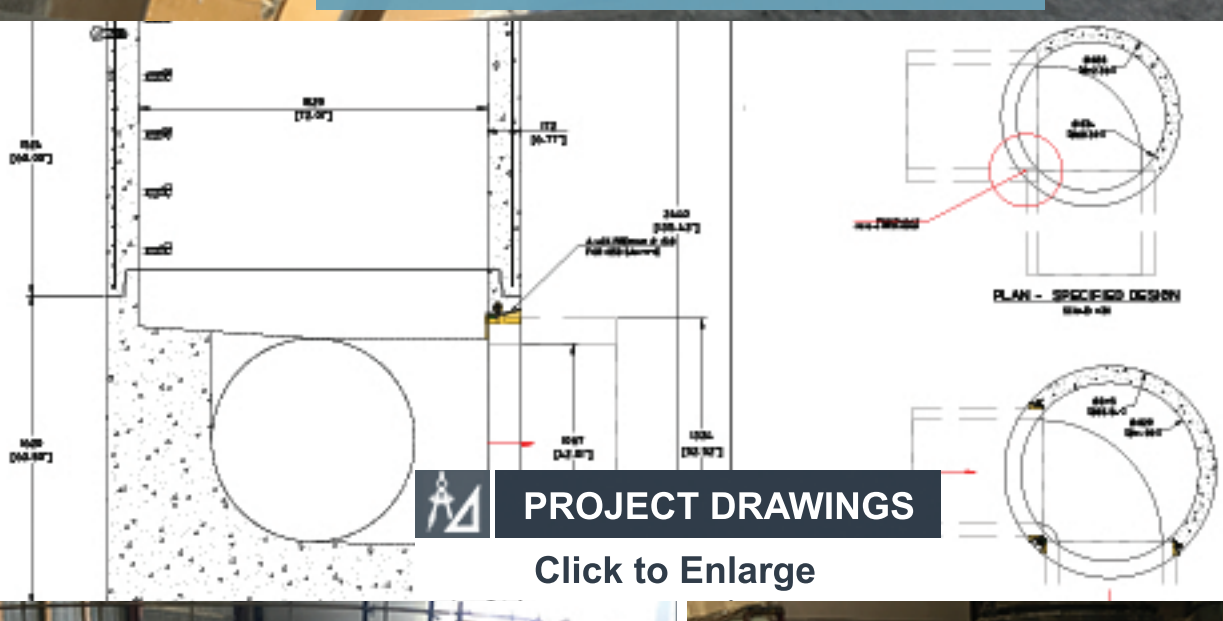

PROJECT DRAWINGS

Click to Enlarge

STEEL REINFORCING SETUP

FORM SETUP FOR UPSIDE-DOWN POURING

FINISHED MANHOLE BASE

FINISHED MANHOLE BASE

ON-SITE INSTALLATION USING ADS SANITITE HP PIPE

WEEKLY NEWSLETTERS
Our Latest News

COMPLETE CAPABILITIES
About Us

info@diamondprecast.com | diamondprecast.com | in | G+ | 1.604.415.5181